

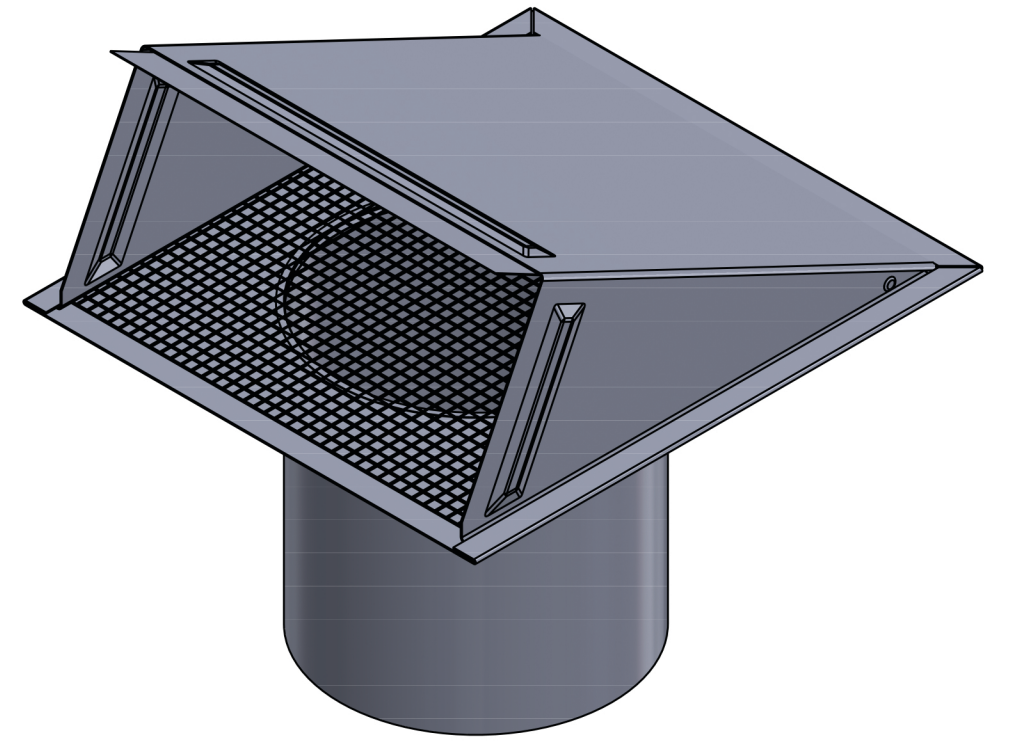
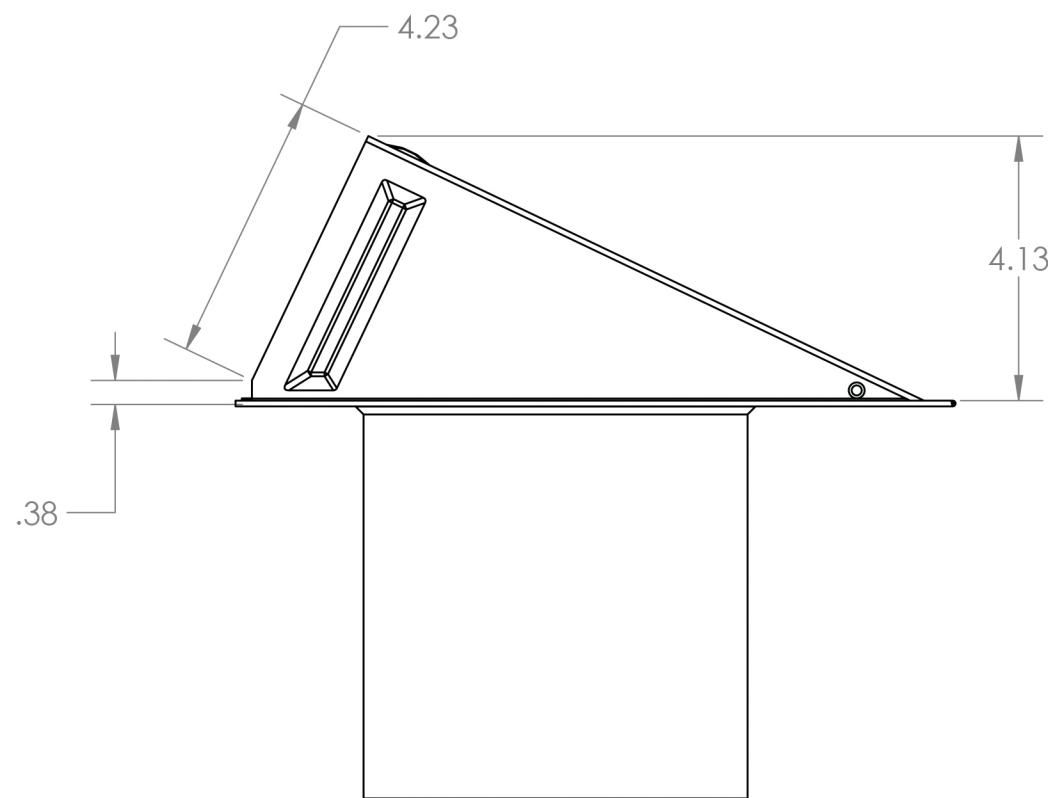
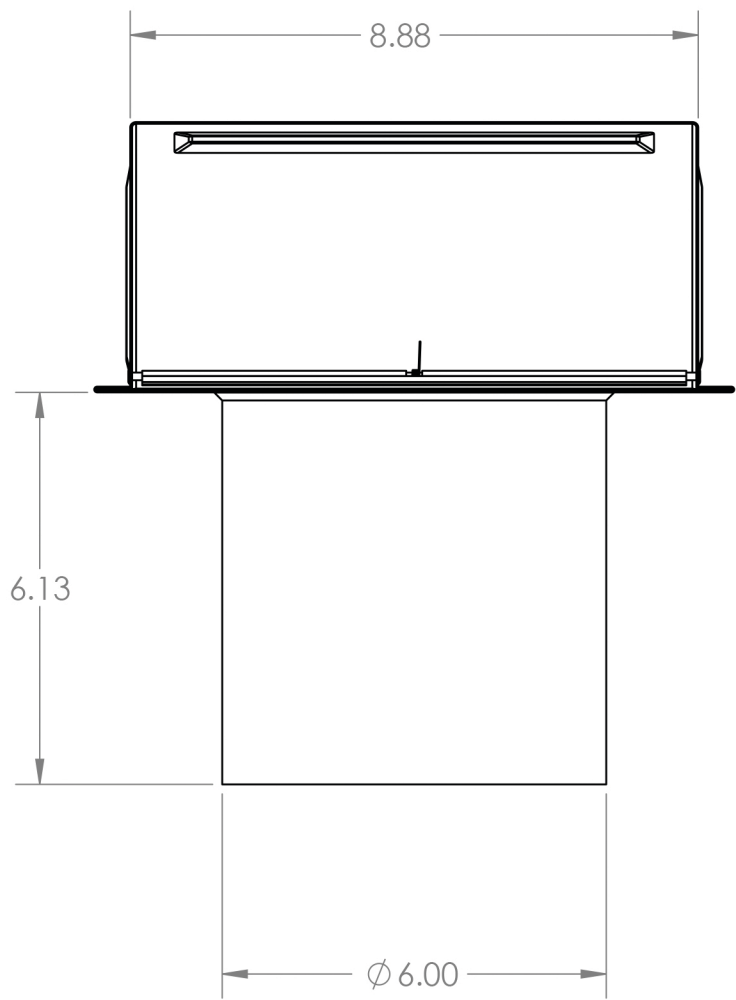


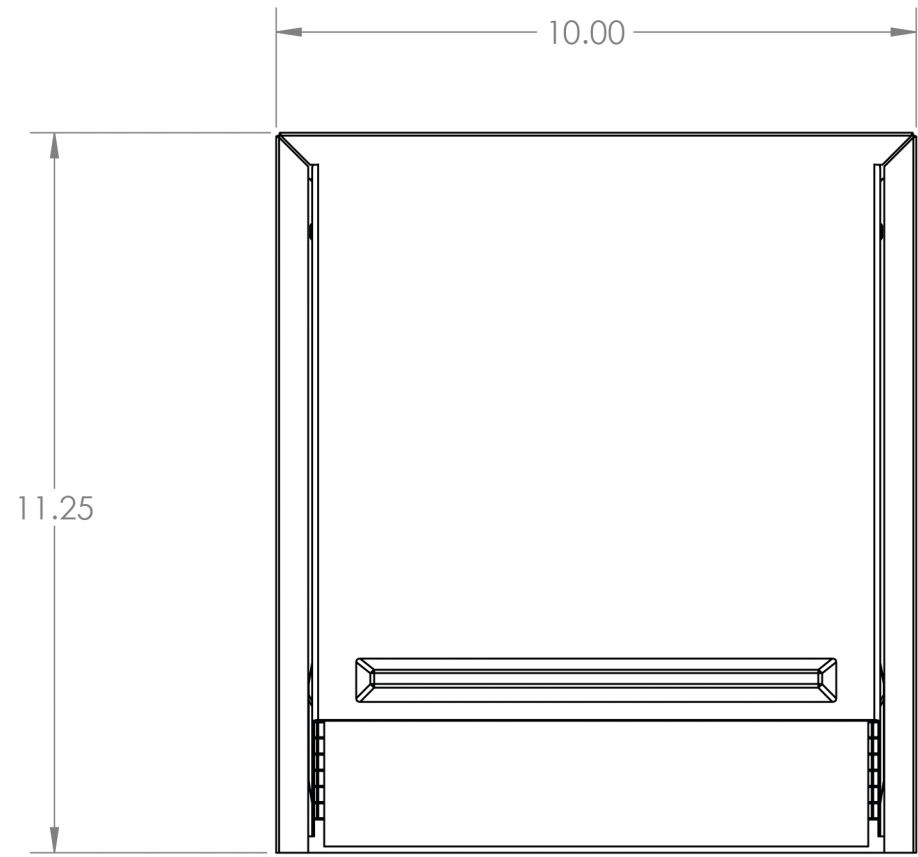

OPEN VENT

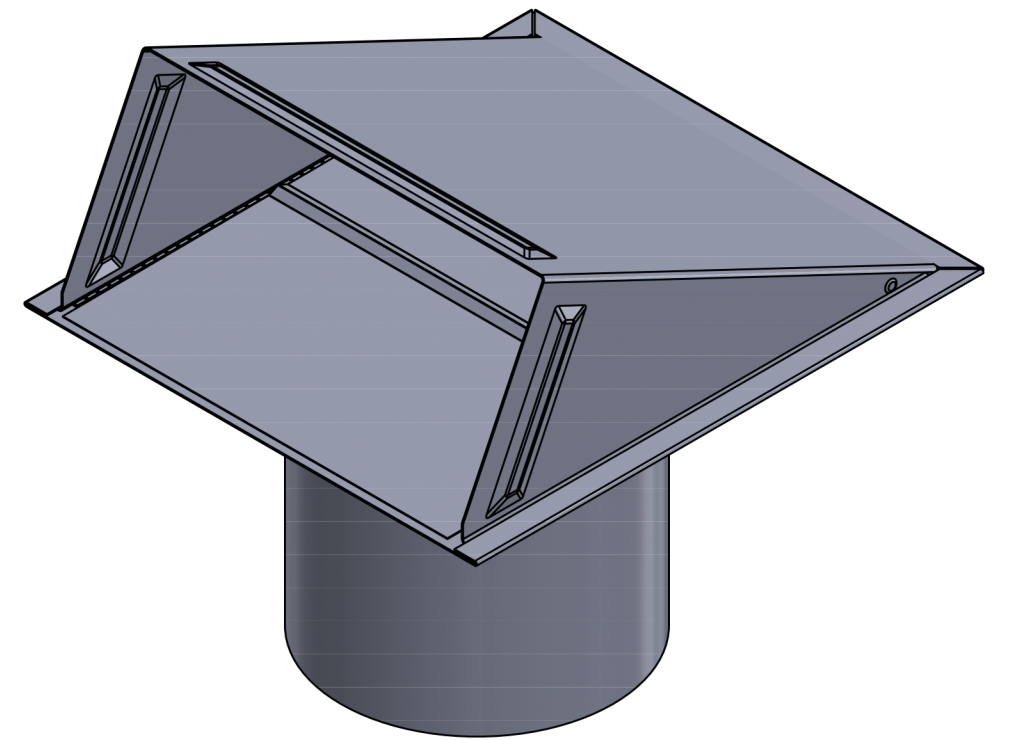

CLOSED VENT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:			NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm .01$ TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.		
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.		
MATERIAL		COMMENTS:		
FINISH		Net Free Area (NFA)		
APPLICATION		Mouth Opening: 40 sq. in. Screen Opening: 15 sq. in.		
		Spring Controlled Damper		

LAMBRO Lambro Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 6" Galvanized Steel Wall Exhaust Hood Vent
Spring Damper - 1/4" Wire Mesh Screen - 6" Pipe
Cover, Base & Pipe: 26 Gauge
Damper: 26 Gauge (Aluminum)

SIZE DWG. NO.
C 3460GMS-6
SCALE: 1:3 WEIGHT: SHEET 1 OF 1