



Series 50

Rectangular CRD

Specifications

UL Classification:

UL Classified UL 555C - For use in non-combustible installations rated 3 hours or less.

Profile:

22Ga 1 Piece Rollformed Frame And Blades

Material:

Galvanized Steel

Fusible Link:

165° F Rated Link - Standard
212° F Rated Link - Optional

Fusible Link Type:



Easy Access Attachment (EA) - Standard
Standard Link Attachment (SL) - Optional

Sizes:

Available in Single-Section Sizes From 4" x 6" or 6" x 4" to 24" x 24"

Thermal Blanket:

Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.

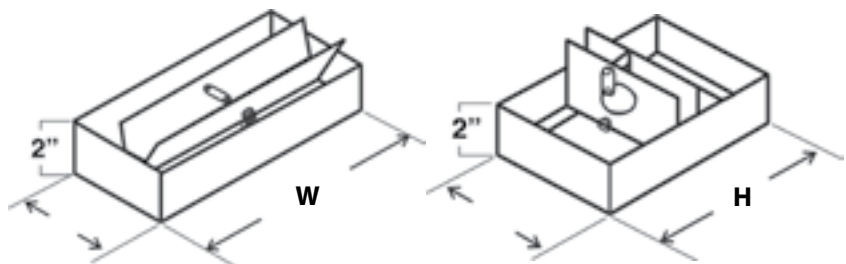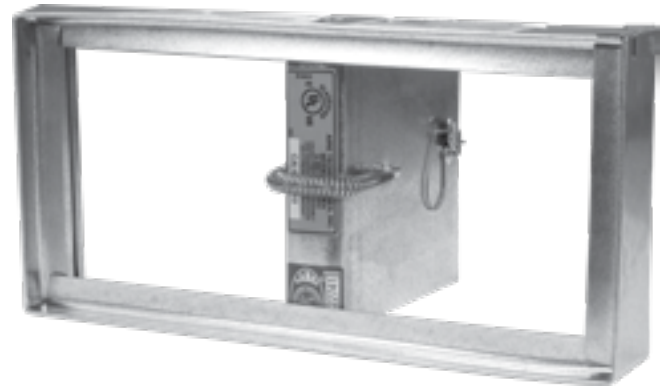

This product meets the requirements for ceiling dampers established by:

UL Standard 555C
NFPA Standard 90A
ICC Building Codes



3226-1650-0103



Aire Technologies

1502 Industrial Drive, Monongahela, PA 15063

1-866-421-AIRE

atorders@airetechnologies.com

AireTechnologies.com

Part Number Format

5 0 E A 0 6 1 0 G

MODEL

50 SERIES - CRD, RECTANGULAR, 3 Hour

METHOD OF LINK ATTACHMENT

SL - STANDARD LINK
EA - EASY ACCESS LINK

DAMPER
WIDTH

DAMPER
HEIGHT

MATERIAL & LINK TEMP.

G - GALVANIZED, W/165° LINK
H - GALVANIZED, W/212° LINK

Qty.	Damper Size		Fusible Link Temp (165°F) std.
	W	H	

